

PEPWAVE MAX Adapter

Mounting Bracket for ACCESS NX Portable

Attaching the Modem(s)

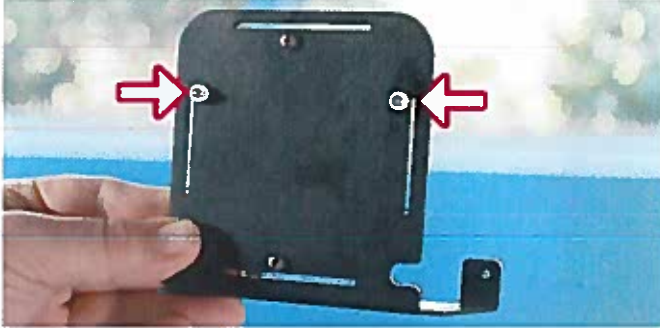


Figure 1 – Mounting Posts



Figure 2 – Screw Holes

1) **Locate the Mounting Posts:** The modem bracket contains two pairs of mounting posts, one vertical pair facing down toward the ACCESS NX and one horizontal pair facing up away from the unit.

2) **Locate the Screw Holes:** The Pepwave MAX Adapter contains four screw holes on the “underside”, where the model label can be found. One pair of these holes will align with the mounting posts on the bracket.



Figure 3 – Modem Position



Figure 4 – Second Modem

3) **Align the Modem:** Align the correct screw holes with one set of mounting posts on the modem bracket and attach the modem by tightening the screws from the other side of the bracket.

4) **Align a 2nd Modem:** To attach a second modem, repeat the process using the remaining set of mounting posts.

Installing the Bracket

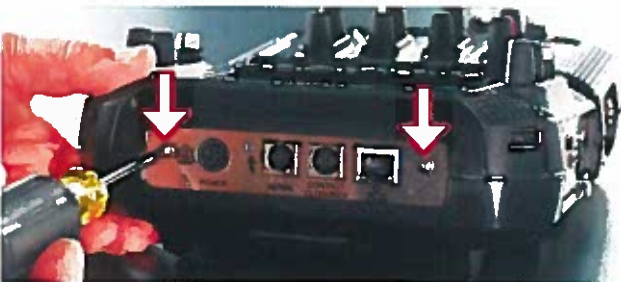


Figure 5 – Mounting Screws

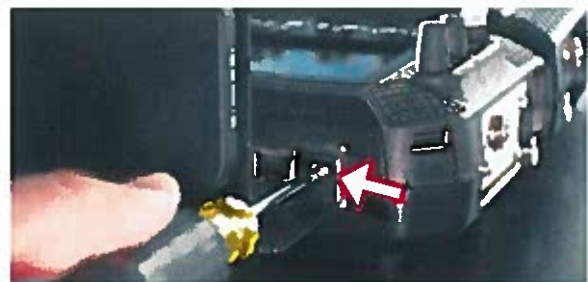


Figure 6 – Bracket Position

5) **Locate the Mounting Screws:** The ACCESS NX Portable comes equipped with two accessory-mounting screws, located on the “top” metal plate, where the A/C power and Ethernet jacks can be found.

6) **Secure the Bracket in Place:** Remove the two screws and use them to attach the modem bracket to the ACCESS NX Portable. The bracket’s longest side should rise “forward”, past the LCD touchscreen.

Connect via USB

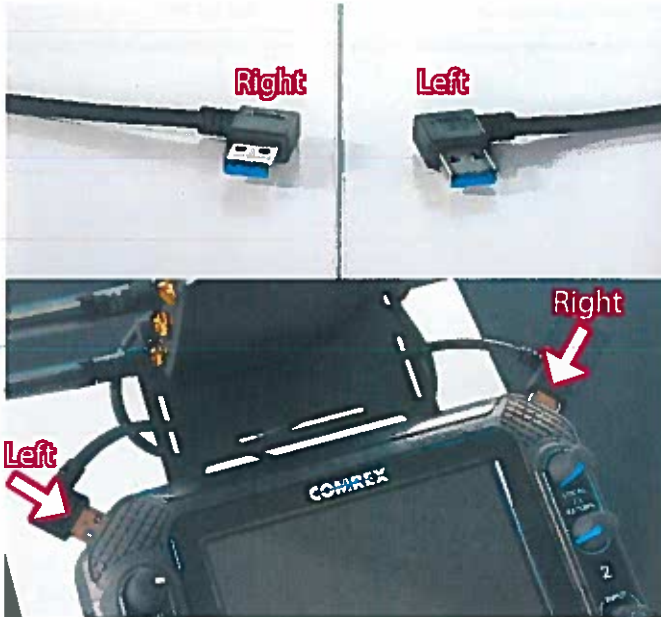


Figure 7 – “Righty” and “Lefty”

7) **Identify the Left and Right USB Cables:** The modem bracket comes with two different USB cables. One cable is oriented toward the ACCESS NX’s ‘Right’ USB port, and the other is oriented for the ‘Left’ USB port.

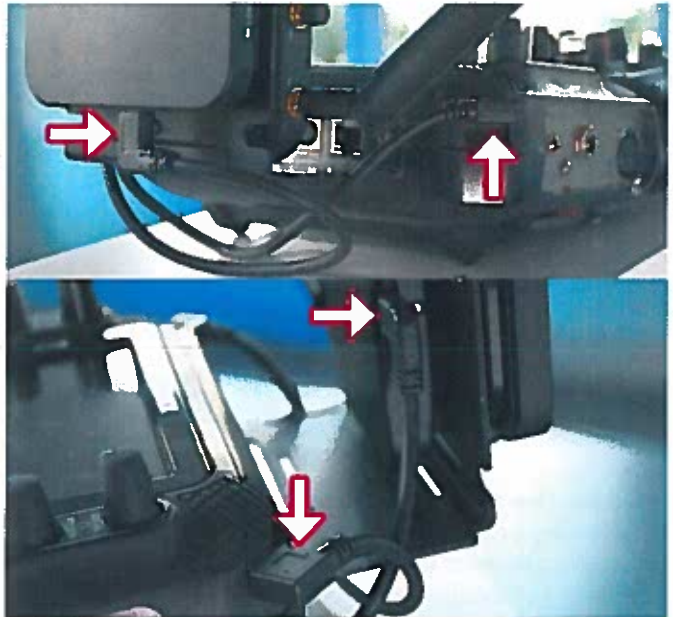


Figure 8 – USBs Plugged

8) **Connect the Cable(s):** Connect the smaller USB-C side into the Pepwave MAX Adapter, then connect the larger USB A side into the appropriate USB port on the ACCESS NX Portable.

Enable in Network Manager



Figure 9 – Network Manager

9) **Open the Network Manager:** Open the ACCESS NX Portable’s Network Manager by pressing the 3-line menu button in the upper left corner of the touchscreen and choosing “Network Manager”.

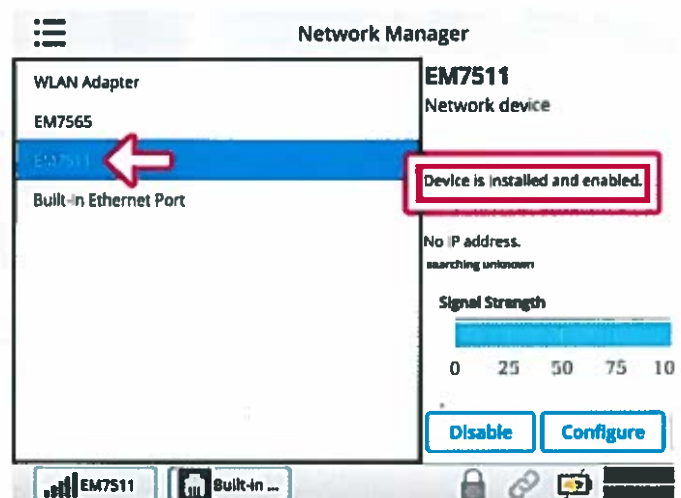


Figure 10 – Enable Device

10) **Enable the Installed Modem(s):** Find the Pepwave MAX Adapter in the network device list on the left side of the screen and select it to open more details on the right side. Ensure that the modem is listed as “Installed and enabled”. Tap the “Enable” button below if needed.